


# KERN 440-47N

The classic balance in the laboratory

# KERN

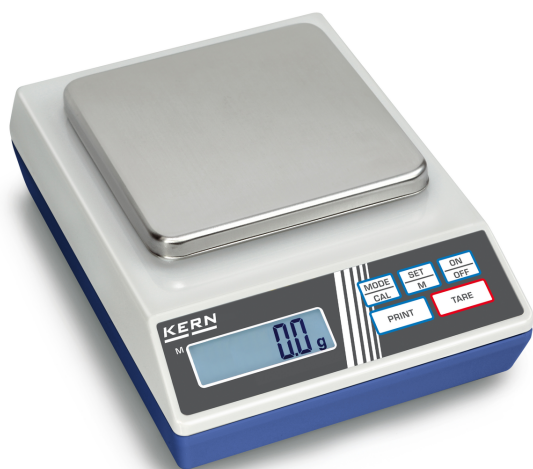

## Construction

Dimension housing (W×D×H)	165×230×74 mm
Dimensions weighing surface (W×D)	130×130 mm
Material housing	plastic
Material weighing plate	stainless steel

## Functions

Number of keys for operation	5
Auto-off interval(s) in battery mode/rechargeable battery mode	3 min off
Tare function	manual (multi)
Percentage determination	✓
Counting function	✓
Function for averaging under unstable weighing conditions	✓
Recipe/summing level	Rez A (Net total)
Underfloor weighing	Hook (optional)
Interfaces	RS-232 standard

## Counting

Smallest piece weight when piece counting - laboratory conditions	200 mg
Smallest piece weight when piece counting - normal conditions	2 g
Reference quantity	5, 10, 20, 25, 50
Counting resolution (laboratory conditions)	10.000

## Power Supply

Input voltage power supply / power [Max]	100 - 240 V AC 50/60 Hz 0.5 A
Input voltage device / power [Max]	9 V, 300 mA
Supplied plug-in power supply	Power supply unit
Plug-in power supply / adapter for countries - included with the delivery	EURO UK US CH
Plug-in power supply / adapter for countries - optional	EURO UK US CH
Rechargeable battery optional	Rchrg. battery optional
Rechargeable battery charging time	10 h
Rechargeable battery operating time - backlight off	20 h
Battery	9 V block
Battery operating time	20 h

## Category

Brand	KERN
Product category	Laboratory balances
Product group	Precision balances

## Measuring System

Readability [d]	0,1 g
Weighing capacity [Max]	2000 g
Eccentric loading at 1/3 [Max]	0,3 g
USP Minimum weight of sample (k = 2, U = 0.1%)	200 g
Reproducibility	0,1 g
Linearity	± 0,2 g
Weighing system	Strain gauge
Resolution	20.000
Units	kg g dwt tl (Tw) tl (HK) ozt mo lb oz tol
Default unit	g
Stabilization time	3 s
Warm-up time	30 min
Adjustment options	Adjusting with external weight
Recommended adjusting weight	2 kg (M1)
Possible calibration points	500 g; 1 kg; 1,5 kg; 2 kg

## Approval

CE mark	✓
---------	---

## Display

Display digit height	15 mm
Display backlight	✓

# KERN 440-47N



The classic balance in the laboratory

## Environmental conditions

Humidity of environment [Max]	80 %
Ambient temperature [Min]	5 °C
Ambient temperature [Max]	35 °C

## Packing & Shipping


Readability force [d] (N)	1 d
Shipping method	Parcel service
Dimensions packaging (W×D×H)	348×212×178 mm
Net weight approx.	1,2 kg
Gross weight approx.	1,6 kg

## Services (optional)

Article number for adjustment at the location of installation	961-247
Article number for DAkkS calibration	963-127
Article number for certificate of conformity (verification)	969-517

## Piktogramme

### STANDARD

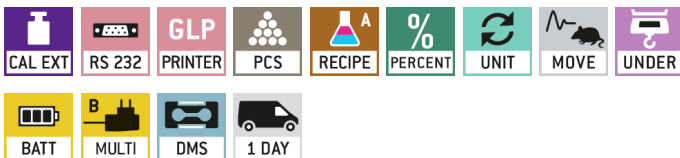

### OPTION

