


# KERN ADJ 600-C3

# KERN

The price leader in analytical balances, with internal or external adjustment - now available as a model with [Max] 220g!

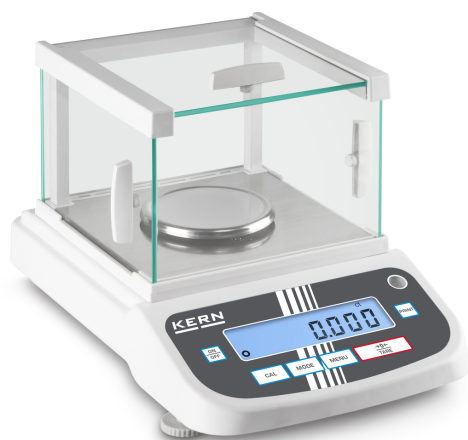

## Display

Display digit height	16 mm
Display backlight	✓
Languages of the user interface	Symbol language

## Construction

Dimension housing (W×D×H)	230×310×210 mm
Dimensions rectangular draught shield - inner (W×D×H)	170×160×110 mm
Dimensions rectangular draught shield - outer (W×D×H)	175×175×130 mm
Dimensions weighing surface (Ø)	90 mm
Material housing	plastic
Material display housing	Plastics
Material weighing plate	stainless steel
Material draught shield	glass
Levelling feet adjustable	✓

## Functions

Number of keys for operation	6
Tare function	manual (multi)
Percentage determination	✓
Counting function	✓
Standby function	✓
Interfaces	RS-232 standard

## Counting

Smallest piece weight when piece counting - laboratory conditions	1 mg
Smallest piece weight when piece counting - normal conditions	10 mg
Reference quantity	5, 10, 20, 50, 100
Counting resolution (laboratory conditions)	120.000

## Power Supply

Input voltage power supply / power [Max]	100 - 265 V; 50 - 60 Hz; 2,0 A
Input voltage device / power [Max]	12 V; 2 A
Supplied plug-in power supply	Power supply unit
Plug-in power supply / adapter for countries - included with the delivery	EURO UK US
Plug-in power supply / adapter for countries - optional	EURO UK US CH

## Category

Brand	KERN
Product category	Laboratory balances
Product group	Analytical balances

## Measuring System

Readability [d]	0,0001 g
Readability carat [d] (ct)	0,001 ct
Weighing capacity [Max]	600 ct
Weighing capacity [Max] (ct)	600 ct
Eccentric loading at 1/3 [Max]	0,0025 ct
USP Minimum weight of sample (k = 2, U = 0.1%)	400 mg
Reproducibility	0,002 ct
Linearity	± 0,004 ct
Weighing system	Force compensation
Resolution	1.200.000
Tare range	600 ct
Units	g ct lb oz
Default unit	g
Stabilization time	4 s
Warm-up time	8 h
Adjustment options	Internal calibration (automatic)
Possible calibration points	100 g; 120 g
Automatic adjustment - Standard temperature deviation	2 °C
Automatic adjustment - Standard time interval	3 h

## Approval

CE mark	✓
---------	---

# KERN ADJ 600-C3



The price leader in analytical balances, with internal or external adjustment - now available as a model with [Max] 220g!

## Environmental conditions

Humidity of environment [Min]	20 %
Humidity of environment [Max]	85 %
Ambient temperature [Min]	10 °C
Ambient temperature [Max]	30 °C

## Packing & Shipping

Readability force [d] (N)	1 d
Shipping method	Parcel service
Dimensions packaging (W×D×H)	336×455×425 mm
Net weight approx.	4,6 kg
Gross weight approx.	7 kg

## Services (optional)

Article number for DAkkS calibration	963-101
Article number for certificate of conformity (verification)	969-517

## Piktogramme

### STANDARD



### OPTION

